

## Soft Mount Washer-Extractor Type B

Designed with a heavy duty suspension absorber system to eliminate the need for a special concrete foundation, our soft mount washer is convenient for installation on higher floors. It also features high G-force extraction to reduce water remaining in the laundry after a wash, and thus reduces drying time and utility cost.



### Features

- Industrial design with heavy-duty suspension absorber
- 300 G Force
- Four compartment detergent box
- Unique perforated drum
- Quality Parts – (NSK Bearing, Suspa Absorbers, Depend-O-Drian Valve\*\*)
- Single Phase for Easy Installation
- High Contrast Graphic LCD Screen
- Multiple Payment Options\*\*


### Options

- AISI304 Stainless steel Front Panel or Artificial Stainless Steel Panel
- Additional 3/4" Water Inlet Valve


## Technical Specifications

Models	SXT-150FT	SXT-250FT
<b>DRUM</b>		
Nominal Capacity 1:10	15	25
Maximum Capacity 1:9	17	28
Drum Volume (Liter)	149	251
Drum Diameter (mm)	774	774
Drum Depth (mm)	438	534
<b>DIMENSIONS</b>		
Width (mm)	912	1062
Height (mm)	1343	1445
Depth (mm)	877	1202
Weight (kg)	300	720
<b>DIMENSIONS WITH PACKAGING</b>		
Crated Width (mm)	950	1100
Crated Height (mm)	1450	1550
Crated Depth (mm)	900	1228
Crated Weight (kg)	315	735
<b>DOOR</b>		
Door Opening (mm)	418	418
Height To Bottom Of Door (mm)	460	550
<b>CONNECTION</b>		
Water Inlet (mm)	19	19
Drain (mm)	51	76
<b>OPERATING SPEED</b>		
Washing Speed (RPM)	42-45	42-45
Spinning Speed (RPM) - Maximum	900	860
G-Force - Maximum	300	320
<b>MOTOR</b>		
Type of Motor (AC/DC)	AC	AC
Motor Power Consumption (kW)	1.5	2.2
<b>ELECTRICAL REQUIREMENT</b>		
Power Supply	220-240VAC @ 50/60Hz + 1PH	


\* Due to continuous product improvements, design and specifications are subject to change without prior notice.

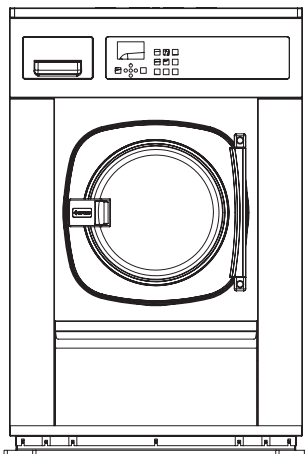

Front View

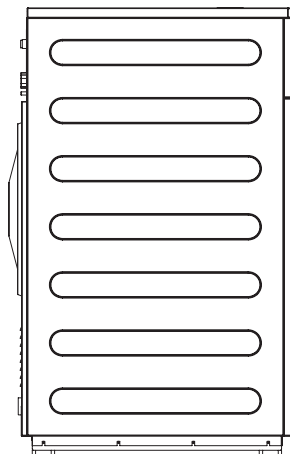

Side View

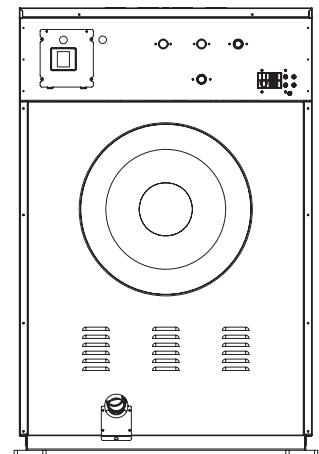

Back View